


PICCO THERMOSTATIC HEAD

GS.02, GS.03, GS.04

Thermostatic head meets requirements of PN-EN 215:2005 norm

Technical data:

Range	8°C – 30°C* (16°C - 30°C)
Maximum external temperature	50°C
Closure time	16 min.
Pressure difference impact	< 1K
Hysteresis	0,3K
Heating factor temperature impact	1,23K

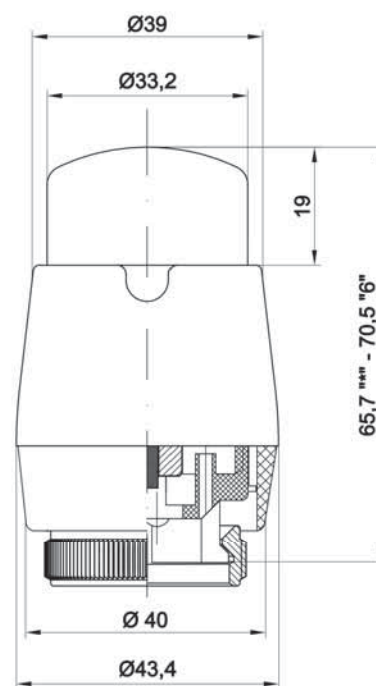

* LIMITING THE TEMPERATURE ADJUSTMENT RANGE

The temperature range regulation can be limited on customer's request according to values on setting scale. The customer can also apply it independently. In order to do so, you should screw out a blocking spare split pin with a small screw driver on set no. 6, which is situated in a slot no. 0 and place it in another slot, for example no. 4 for maximum temperature of 24°C, etc. To decrease a minimum temperature in a room to 16°C, you should place a blocking split pin in a slot no. 2 and set the head on no. 2. In GS.04 thermostatic heads a temperature can be limited only to 8°C to 16°C and from 16°C to 30°C.



Application:

The „Picco“ thermostatic head is a radiator temperature controller with an economical design. It allows you to maintain the desired thermal comfort in the room while taking into account heat gains from other sources, such as heat gain from people, lighting, and sun exposure.

Due to its design, it guarantees easy cleaning, which makes it irreplaceable in hospital, sanatorium, school, etc.

Characteristics:

- Reliable fluid sensor
- Regulating knob with digital marking
- Protection from freezing function (8°C on a setting marked with *)
- Main body made of high quality plastic and aluminum

Regulation scale corresponding to the following temperature:

•	1	2	3	4	5	6
8°C	12°	16°	20°	24°C	28°	30°C